


Panel Fan

J&D Manufacturing's Panel Fan has a rugged x-frame mount with an efficient motor, and a powerful balanced blade that is designed to create air velocity. The cushion-mounted, maintenance-free bearings and heavy-duty automatic belt-tensioning device make this fan one of the highest performing, lowest maintenance, and greatest valued fans on the market!

Features

- Cast steel pulleys
- Balanced, high-output, galvanized or Lifetime Warranty cast aluminum blades
- Heavy-duty G90 galvanized 18-gauge venturi with gusset support X-frame provides superior strength and rigidity to minimize vibration compared to angle iron, square or round tube designs
- 50" and 55" models include an auto belt tensioner to reduce bounce at startup, and provide self-adjusting uniform loading throughout the life of the belt for high efficiency
- Shaft bearings are eccentric locking pre-lubricated, permanently sealed and rubber mounted for smooth operation and reduced blade fatigue, and are covered by a **7 Year Warranty**.
- Wide assortment of optional mounting brackets for wood and steel posts for precise airflow
- Maximize your cooling capabilities by adding a stainless steel, 12-nozzle, high pressure fog ring kit
- Totally enclosed, maintenance-free, high-efficiency motors have completely sealed ball bearings, UL and CUL certification (File# E219338 / E315335), and are covered by a Two Year Warranty.
- Totally enclosed, maintenance-free, high-efficiency motors have completely sealed ball bearings, UL and CUL certification (File# E219338 / E315335), and are covered by a **Two Year Warranty**

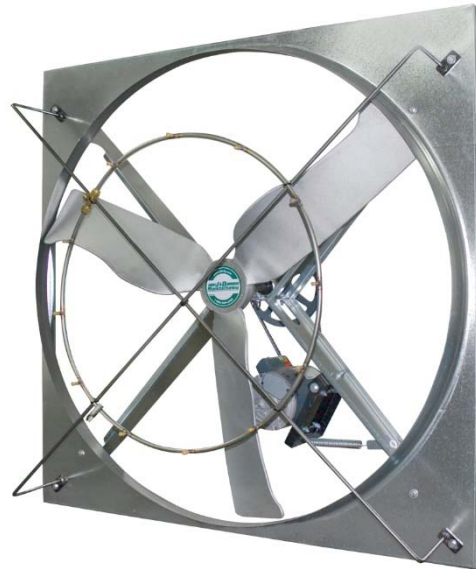

Part#	Size	HP	Volt	Amps	Hz	Phs	KW	RPM	Thrust CFM	Drive	Blade
VPX50GV31011	50"	1	115/230	8.6/4.3	50/60	1	1.04	583	23.700	Belt	3- Galv
VPX50GV61011	50"	1	115/230	8.6/4.3	50/60	1	1.14	469	24,200	Belt	6-Galv
VPX50CA31011	50"	1	115/230	8.6/4.3	50/60	1	1.10	583	23,800	Belt	3-CA
VPX50CA31011-E	50"	1	115/230	8.6/4.3	50/60	1	0.95	553	22.700	Belt	3-CA
VPX50GV31031	50"	1	230/460	3.4/1.7	50/60	3	0.83	586	23.000	Belt	3- Galv
VPX50GV61031	50"	1	230/460	3.4/1.7	50/60	3	1.18	470	24.400	Belt	6-Galv
VPX50CA31031	50"	1	230/460	3.4/1.7	50/60	3	1.13	583	24.100	Belt	3-CA
VPX55GV31531	50"	1.5	230/460	4.8/2.4	50/60	3	1.46	577	30.600	Belt	3- Galv
VPX55GV32031	55"	2	230/460	6.2/3.1	50/60	3	1.43	582	30.600	Belt	6-Galv


CA-Cast Aluminum
Bold red text is data certified by BESS Labs using ANSI/AMCA Standard 230-12.
OSHA requires this fan to be mounted 7' above the floor.

Panel Fan Installation Options


50"	55"	Part#	Description
X	X	VRSBRP3	Inline Mounting Bracket, 3"-3 1/2" Column, Black Powder Coat & Galvanized
X	X	VRSBRP4	Inline Mounting Bracket, 4"-4 1/2" Column, Black Powder Coat & Galvanized
X	X	VRSBRP5	Inline Mounting Bracket, 5"-5 1/2" Column, Black Powder Coat & Galvanized
X	X	VRSBRP6	Inline Mounting Bracket, 6"-6 1/2" Column, Black Powder Coat & Galvanized
X	X	VRSBRP6P	Swivel Offset Mounting Bracket, 4"-6" Column, Wood Post, Galvanized
X	X	HK119	Chain Suspending Kit, (2) 72" of Chain, Chain to Fan Connecting Hardware

HPF Panel Fan Ring Kit

Increase the cooling power of your 50" and 55" panel fan. Easy to install x-frame and quick connect slip lock fitting for high pressure nylon tubing making this a great way to retrofit your barn.

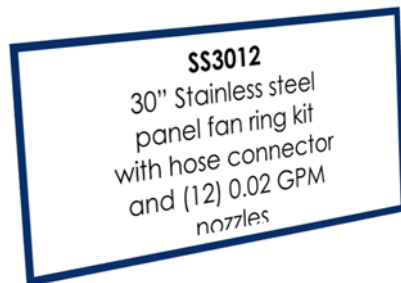

Part#	Description
SS3012	Fog Ring Kit, 30" Stainless Steel with Coupler, (12) 0.02 GPM Anti Drip Brass Nozzles, X-Frame w/Mounting Ties

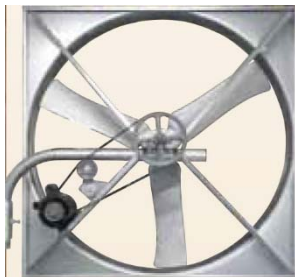

Swivel Offset Mounting Bracket,
4" -6" Column, Wood Post, Galvanized