

With bracket / Frame - MS-C TYPE

CE
(for pump + motor only)

Working Pressure: 70 bar/ 1000psi

Aluminum alloy motor housing

Precise Ceramic 3 Plungers (ceramic + stainless steel for 1HP up)


High-pressure durable brass-casting making of pump head

Included :

1. Pump set :
Metal frame (powder coated) + Electrical box
2. Magnetic contactor
3. Thermal overload protection
4. 1 sec-60 minutes dual timer
5. 1 indicator
6. Auto-manual switch set
7. Low pressure protection switch
8. One 10" PP filter 5 micron
9. Inlet solenoid valve(NC)
10. Outlet solenoid valve(NC)



Model	HP	LPM app.	Volts	Hz*	Phase
MS-C20307	1/3	1.2	220	50	1
MS-C20507	1/2	2.4	220	50	1

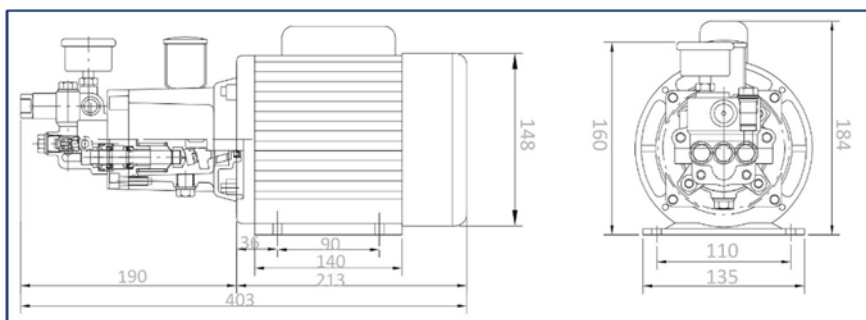

*Available in 60 Hz